

# WROTT<sup>®</sup>



**Table of contents****F80DGA Table of contents**

Modell support	S.3
Product description	S.4
System components	S.5
Operating concepnt	S.13
key functions	S.13
Sprint function	S.15
Quarter mile function	S.16
Software update	S.17
Purchased parts package	S.18
Technical data	S.19

Article: F3x DGA	Version: V1.0	Page: 3
Author: Awron GmbH	Date: 10.03.2014	

Modell support

**F82DGA**

**3 F-Series**



F82- M4

All models with following engines are supported:

Turbo- Gasoline engine

## Product description

# F82DGA Product description

### Measurement data display:

- [Boost pressure](#)
- [Torque](#)
- [Performance](#)
- [Performance chart](#)
- [Lateral and Longitudinal acceleration](#)
- [Sprint](#)
- [Quarter of a mile](#)
- [Lambda values and exhaust gas temperature](#)
- [Rail pressure and fuel pressure](#)
- [Maximum values](#)

Visually, the display fits perfectly into the Interior. The monitor, which is equipped with latest OLED technology is incorporated into the existing ventilation shaft. Thus, no external holders are necessary, and you have a good view of the displays while driving.

To operate the Displaysystem, you just have to use the steering wheel buttons. Thus, control of the vehicle by the driver is always maintained.



## System components

### Boost pressure display

1 Battery voltage

2 Boost pressure bar

5 Cooling water temperature



3 Peek holder bar

4 Boost pressure

6 Temperature of the gear

1 Indicates the current battery voltage

2 Graphically represents the boost pressure, between 0 and 1.35 bar, and is equipped with a towing pointer

3 Holds the early maximum of loading pressure for 2 seconds

4 Indicates the charging pressure digital, between 0 and 1.35 bar

5 Specifies the current cooling temperature in °C

6 Specifies the temperature of the gear, between - 40 °C and 150 °C

### Torque display

1 Battery voltage

2 Torque bar

5 Cooling water temperature



3 Peek holder bar

4 Torque

6 Temperature of the gear

1 Indicates the current battery voltage

2 Graphically represents the torque between 0 and 650 Newton Mertes, and is equipped with a towing pointer

3 Holds the early maximum of loading pressure for 2 seconds

4 Indicates digital torque between 0 and 650 Newton metres

5 Specifies the current cooling temperature in °C

6 Specifies the temperature of the gear, between - 40 °C and 150 °C

## System components

### Performance display

1 Battery voltage



3 Peek holder bar

2 Power bar

4 Power

5 Cooling water temperature

6 Temperature of the gear

- 1 Indicates the current battery voltage
- 2 Represents the power between 0 and 400 PS and is equipped with a peek holder bar
- 3 Holds the early maximum of loading pressure for 2 seconds
- 4 Specifies the power digital between 0 to 400 PS
- 5 Specifies the current cooling temperature in °C
- 6 Specifies the temperature of the gear, between - 40 °C and 150 °C

### Performance chart

1 Power



3 Torque graph

2 Power

4 Torque

- 1 Graphically represents the power
- 2 Specifies the power digital between 0 and 500 hp; the provisional maximum value is kept
- 3 Graphically represents the torque
- 4 Specifies the torque digital between 0 and 600 Nm; the provisional maximum value is kept



## System components

### Lateral and Longitudinal acceleration

1 Longitudinal acceleration

2 Longitudinal acceleration bar

3 Peek holder bar



4 Lateral acceleration

5 Lateral acceleration

1 Specifies the longitudinal acceleration in G ( $G = 9,81 \text{ m/s}^2$ )

2 Graphically represents the longitudinal acceleration, between 0,8G backwards and 0,8G forwards and is equipped with a drag indicator ( $G = 9,81 \text{ m/s}^2$ )

3 Hold for 2 seconds the provisional maximum of longitudinal acceleration

4 Specifies the lateral acceleration in G ( $G = 9,81 \text{ m/s}^2$ )

5 Graphically represents the lateral acceleration between 2,0G to the left and 2,0G to the right, and is equipped with a towing pointer ( $G = 9,81 \text{ m/s}^2$ )

### Sprint display

1 Speed

2 Stopwatch

4 Sprintzeiten

6 Elastizitätsmessung



3 max. Speed

5 GPS- Speed

1 Specifies currently speed in km/h according to the speedometer

2 Specifies the time depending on the current speed

3 Indicates the ever reached maximum speed in km/h

4 Specifies the best Sprint time from 0 to 100 km/h or 0-200 km/h

5 Specifies the GPS- Speed (only displayed if original BMW navigation device is installed)


6 Displays the elasticity of the engine, in the range of 80 km/h to 120 km/h,

## System components

### Quarter mile - Display

1 Stopwatch

2 Maximum values

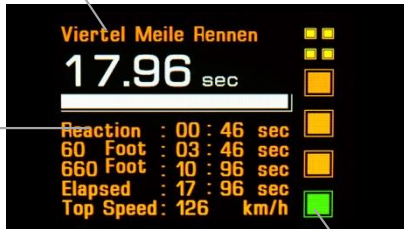

3 Light countdown

- 1 Measures the time up to reach the quarter mile
- 2 Shows the maximum values of the last ride; the values are overwritten at the next race
- 3 Light countdown to the start of the quarter mile race

### Quarter mile- Maximum values

1 Maximum values



- 1 Specifies the maximum value of the quarter mile race; When the switch off the ignition deletes these values



## System components

### Lambdawerte und Abgastemperatur

1 wideband oxygensensor Bank

2 waste gas temperature




3 Rail pressure

- 1 Specifies the current value of wideband oxygen sensor Bank 1; measures the residual oxygen content in the exhaust gas;  $\lambda > 1$  = lean mixture;  $\lambda < 1$  = oily mixture; Range is between 0.65 and 2.5
- 2 Specifies the current exhaust gas temperature between 0 °C and 130 °C
- 3 Displays the current rail pressure, from 0 to 1000 bar (Pressure after the high pressure pump)

### Intake temperature, oil temperature and oil pressure (only for gasoline engines)

1 Intake temperature

2 Oil temperature

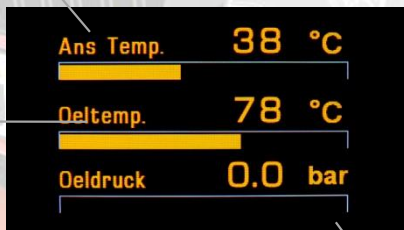


3 Oil pressure

- 1 Specifies the intake temperature from 0 bis 130 °C
- 2 Specifies the current oil temperature from 0 to 130 °C
- 3 Shows the current oil pressure from 0 to 5 bar

## System components

### Intake temperature, oil temperature, fuel pressure (only for diesel engines)

1 Intake temperature

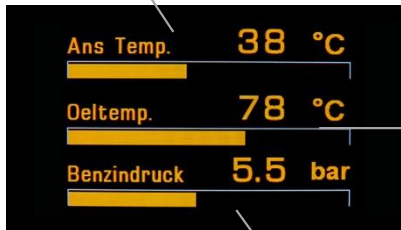

2 Oil temperature

3 Fuel pressure

1 Specifies the intake temperature from 0 to 130 °C

2 Specifies the current oil temperature from 0 to 130 °C

3 Specifies the current fuel pressure from 0 to 10 bar

### Maximum values Page 1

1 Maximum values



Maximalwerte	
Wassertemp.	70 °C
Deltemp.	78 °C
Ansauglufttemp.	38 °C
Abgastemp.	850 °C
Getriebetemp.	42 °C

1 Specifies the maximum value of the current drive; When the switch off the ignition deletes these values

## Systemkomponenten

### Maximum values Page 2

Maximalwerte	
Ladedruck	1.80 bar
Benzindruck	5.5 bar
Raildruck	500 bar
Drehmoment	70 Nm
Leistung	78 PS

1 Maximum values


1 Specifies the maximum value of the current drive; When the switch off the ignition deletes these values

### Maximum values Page 3

Maximalwerte	
-0.00	
0.00	0.40
0.30	

1 Maximum values

1 Shows the maximum values of reached longitudinal and lateral acceleration of the current drive; when the switch off the ignition deletes these values

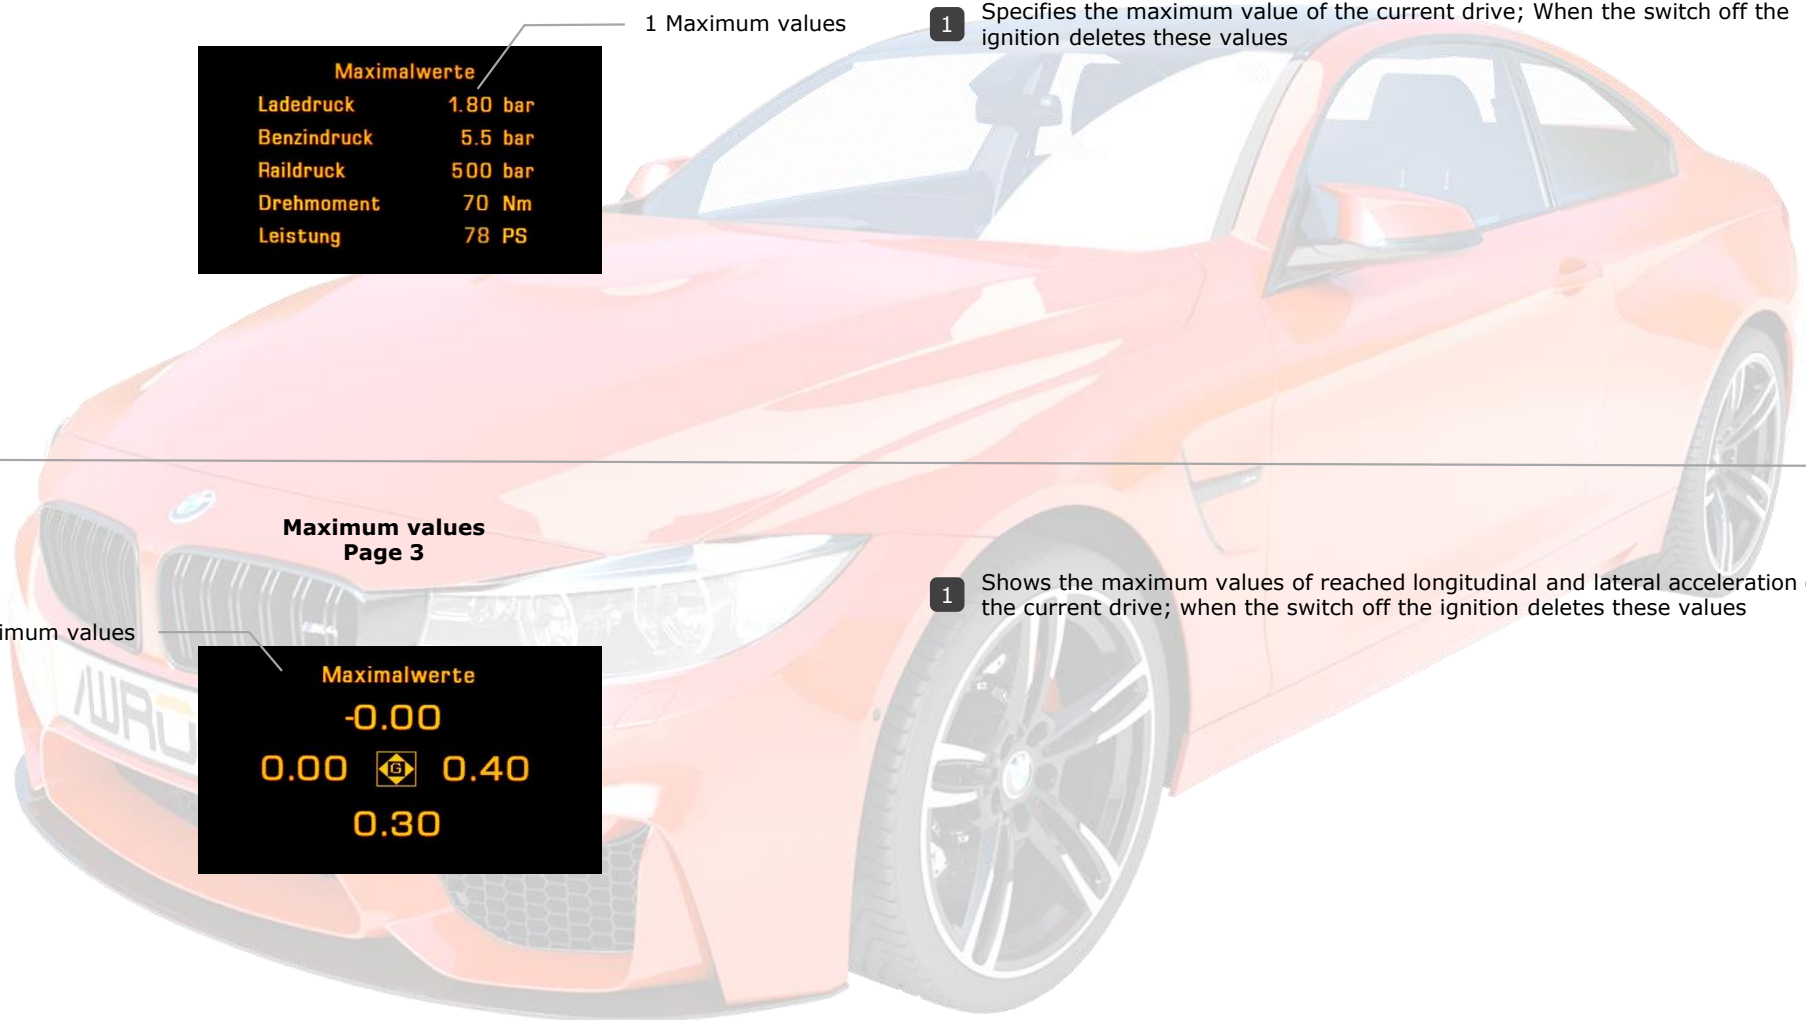

## System components

1 Switch off display

**Switch off display**



- 1 During the brief wait about 2 seconds, the display turns off; by pressing the wheel button it is possible to turn the display back



## Operating concept

# F82DGA Key functions

The display F3xDGA is operated above the already existing rocker switch on the steering wheel of speed control. If the cruise control is switched off, you can switch back and forth between the individual system components.

When the cruise control is on, the display remains in the last active screen and the rocker switch assumes their original function. This allows an easy handling and ensures the control of the vehicle by the driver.

### Changing of system components:

To switch between the individual system components suffice a light tap on the rocker switch up or down. This allows a scroll forwards and backwards.

To enter the settings menu, press the rocker switch fully upwards and hold this position for 2 seconds (see next page).





Operating concept

## F82DGA Key function

To change settings, move the rocker switch to bottom until one has arrived at the desired setting. Move the rocker switch above to confirm or to change the setting.(E.g. switching from km/h to mph).

Move the rocker switch on "Back" to exit the setting menu, and confirm again.

Change options:

- Volume
- Dimming
- German to Englisch
- km/h to mph
- °C / bar to °F / psi



Operating concept

## F82DGA Sprint function

The sprint display is operated only by the driving style of the driver. So they are not any external buttons for the operation necessary.

In the stand is the stopwatch, as well as the speed to 0. As soon as the driver accelerated the timing begins. For the first measurement, from 0 to 100 km/h, the driver will have 15 seconds. If the driver is not able to accelerate to 100 km/h, the measurement stops and the timer goes back to 0. Is the driver able to accelererate to 100 km/h, the second measurement from 0 to 200 km/h begins. For this speed the driver has 10 more seconds, so 25 seconds to speed up to 200 km/h. In addition conducted an elasticity measurement between 80 km/h and 120 km/h. The time reached at full throttle are indicative of the elasticity of the motor.


The maximum achieved times are stored and displayed at the bottom of the display. As well the reached maximum speed is shown in the upper right area of the screen. These stored maximum values are automatically replaced by new highs. If an original BMW navigation system is installed, the current GPS-speed is represented in the lower-right corner of the screen.

To clear the peak values, only the option "Memory delete" must be selected in the Setup menu.



## Operating concept

## F82DGA Quarter mile display

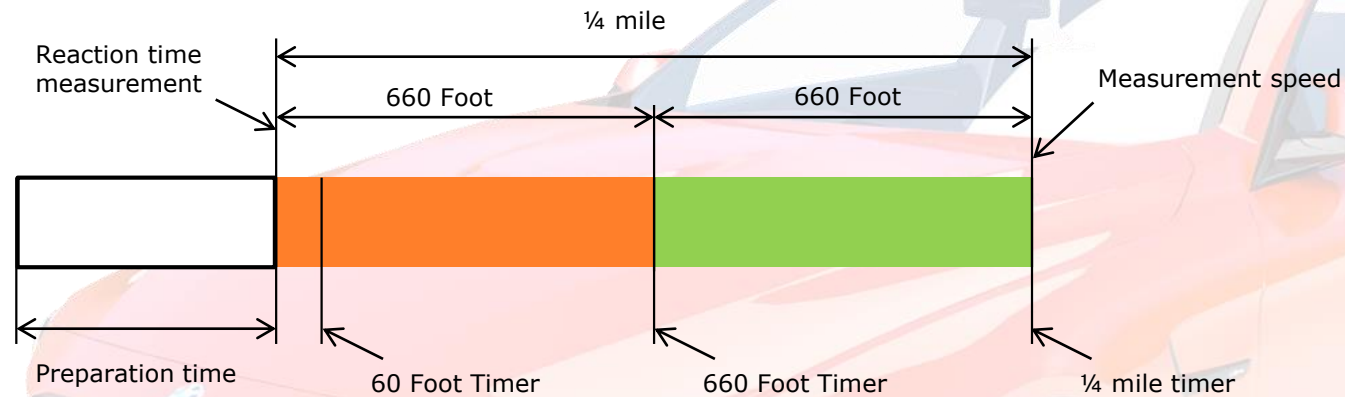

The quarter mile display of F1xDGA serves the riders to perform a drag racing with exact measurements. Due to a short preparation time of 10 seconds, the driver can prepare for the race. The traffic light in the right pane indicates the start time. In the light of the last green signal timing begins.

### 60 Foot timing (18.2 m)

- Measures the time it takes the car to cross the first 60 feet of the track
- Shows you how well the car launches, which affects your elapsed times.

### 660 Foot timer (201,2 m)

- Measures elapsed time at the halfway point of a quarter - mile track.

### 1/4 mile timer (402.4 m)

- Measures the time it takes the car to cross the whole 1/4 mile
- Measures the ever reached top speed

## Operating concept

# F82DGA Quarter mile display

The quarter mile display is operated only by the driving style of the driver. So they are not any external buttons for the operation necessary.


In the stand is the stopwatch to 0. Now the rider has 10 seconds to prepare for the race. This is symbolized by the cube, which can be seen instead of the white bar and gradually disappear.

So the light countdown started in the right of the screen. In the light of green and past cube the driver has 3 seconds time to go. He does not, or he starts too late, the measurement is interrupted.

If the start is successfully the reached values entered.

- Reactiontime
- Time forr 60 Foot (ca. 18,3 m)
- Time forr 660 Foot (ca. 201,2 m - half line)
- Time for quarter mile (ca. 402.4 m)
- Top Speed

These values are displayed as long as until a new measurement begins.

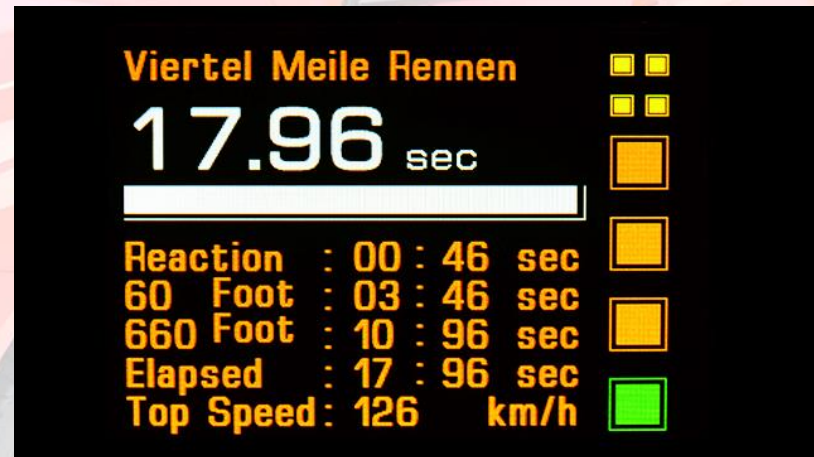








Operating concept

## F82DGA Software update

Software updates are available for the operating systems Windows XP and Windows 7. Required software is available for download at [Awron.de](http://Awron.de). Then the computer has to be connected with the display system via USB and the required driver software installs itself automatically.

The software file must only be opened, and the update starts automatically.

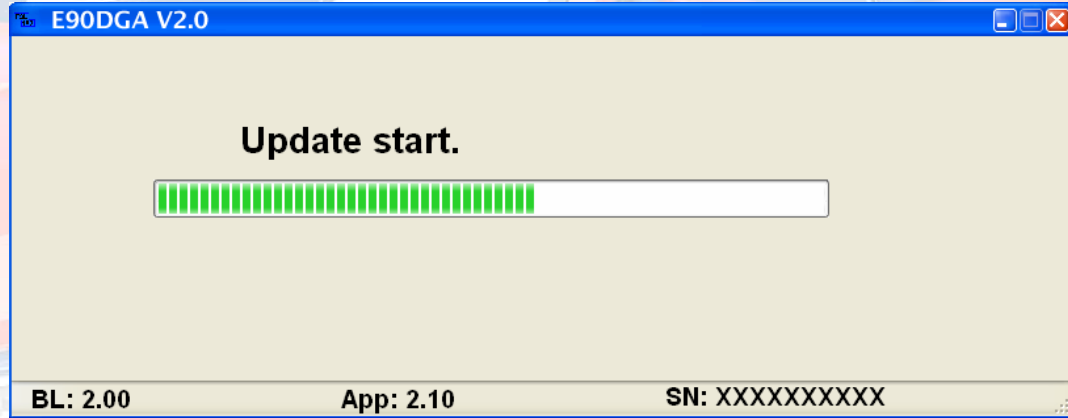

**Purchased parts package**

**F82DGA Purchased parts package**

**Purchased parts package**

- Display system
- Cable harness incl. USB connection
- Operating instructions

This purchased parts package ensures an assembly true the motto of „plug and play“.

The wiring harness is connected directly to the can bus, which ensures a precise data transmission.



## Technical data

# F82DGA Technical data

### Display

- OLED display 320 x 240

### Cutting point

- CAN – Bus 500 KBit
- USB cutting point for Software update

### Case

- Plastic, original BMW air grille

### Size (length x width x depth)

- 310 mm x 80 mm x 120 mm

### Weight

- 300g

